

ArmourScan Quick Start Guide – Meals Plus Legacy



The TekVisions ArmourScan requires no additional drivers or software.

Virtual Serial Mode / COM Port Mode

COM Port Assignment

Windows will assign a different COM Port number to each Pin Pad that is connected to the computer.

Open the Device Manager in Windows (the location and method varies depending on which version of Windows you are running, check the documentation for your system). Alternatively, in any version of Windows, you can open a command prompt and type “devmgmt.msc” followed by the “ENTER” key. The “Device Manager” dialog box will open as shown below:

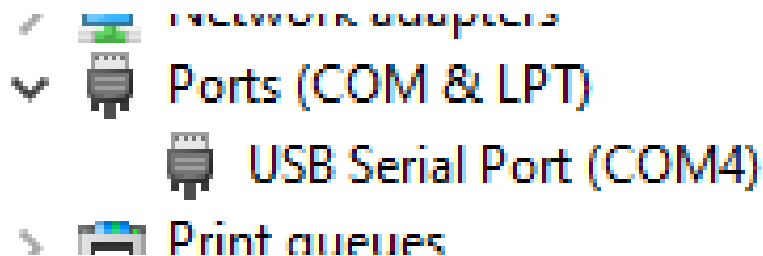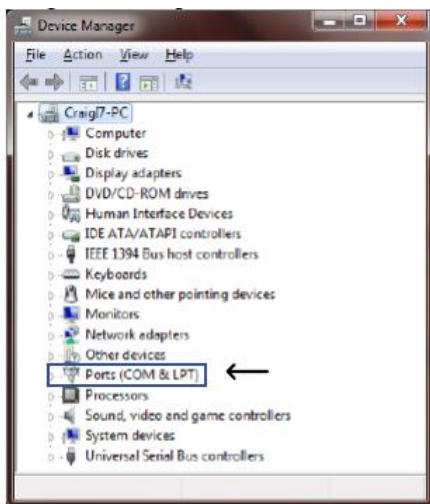


Under the “**Ports (COM & LPT)**” section, double click the COM port device whose COM number you would like to modify. In the example above the ArmourScan was assigned COM4 which is the “USB Serial Port (COM4)”.

Meals Plus Software Setup

Make sure everyone is logged in with Admin Rights.

Go to **Utilities** then **Port Settings**.

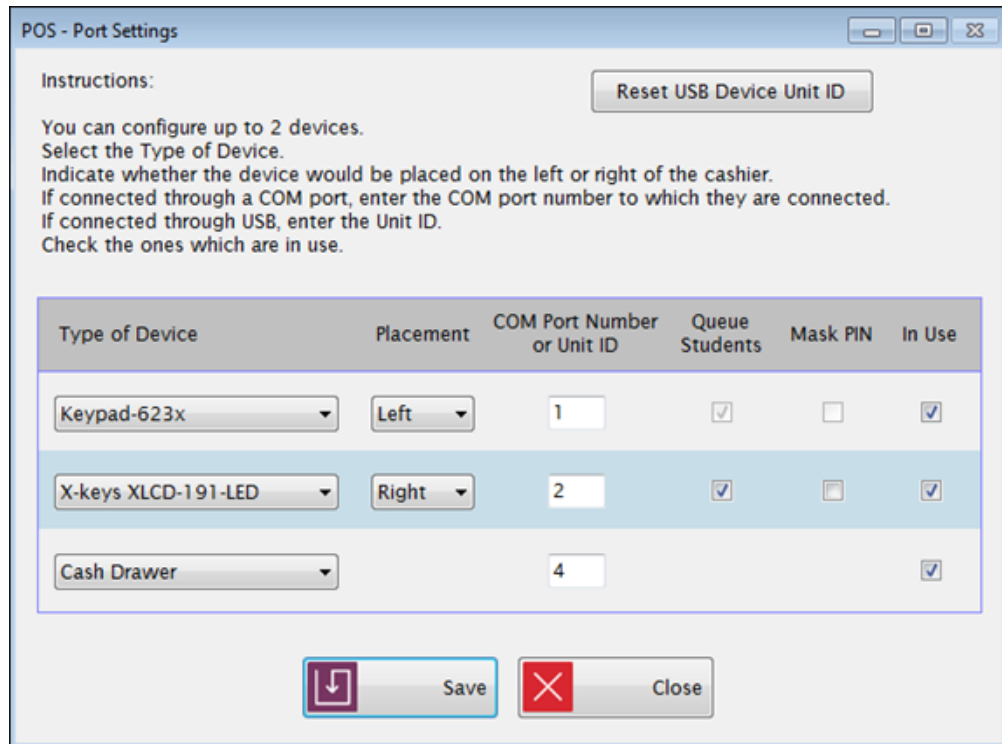

POS - Port Settings

Instructions:

You can configure up to 2 devices.
 Select the Type of Device.
 Indicate whether the device would be placed on the left or right of the cashier.
 If connected through a COM port, enter the COM port number to which they are connected.
 If connected through USB, enter the Unit ID.
 Check the ones which are in use.

Reset USB Device Unit ID

Type of Device	Placement	COM Port Number or Unit ID	Queue Students	Mask PIN	In Use
Keypad-623x	Left	1	☒	☐	☒
X-keys XLCD-191-LED	Right	2	☒	☐	☒
Cash Drawer		4	☐	☐	☒

Save **Close**

Under **Type of Device** select the **Keypad-904**. Under **Placement** select the serving side, either left or right. Under **COM Port Number** enter the COM port from the device manager in the steps above. Make sure the box under **In Use** is checked. Save the changes and test the function.

Settings Menu

Hold F1 key and plug in USB cable
 F2 scrolls through available settings
 1 adjusts settings down, 3 adjusts settings up
 "Enter" saves and exits settings

Available Settings

LCD Contrast and Backlight
 Beeper Pitch, Volume and Duration
 LCD Character Masking

For additional questions or support please contact our technical support department:

Fred Meyerhofer

support@tekvisions.com - 800.827.0127